




LIZZARD See and target!

The retrofit solution for precise and safe targeting of load carriers

- ▶ Precise targeting of load carriers
- ▶ Safe pick-up of load carriers
- ▶ Clear view of the load and over both forks (**LIZZARD** Cam and **LIZZARD** Premium)
- ▶ Less damage to the transported goods
- ▶ Improved ergonomics for the forklift driver
- ▶ Simplified training of new warehouse staff
- ▶ High flexibility: application on any other device is quickly and easily possible
- ▶ Effective work

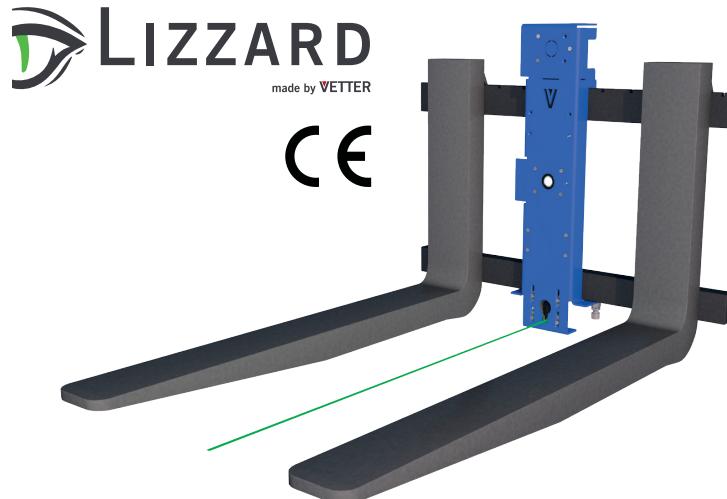

Precise targeting by using a cross laser



Cross laser green, protection class1M



Monitor display in driver's cab



Wireless power supply with VETTER SmartSupply

| Product properties | LIZZARD Premium | LIZZARD Target | LIZZARD Cam |
|--|-----------------|----------------|-------------|
| Solid and robust technology | X | X | X |
| Plug & Play installation | X* | X | X* |
| 1M laser, no risk of eye injury | X | X | |
| Cross laser green | X | X | |
| SmartEnergy: energy-saving mode, deactivation after 120 sec. | X | X | X |
| AHD camera with touch monitor (operating voltage 10V- 32V) | X | | X |
| SmartSupply: Energy supply with standard 18 V battery by BOSCH | X | X | X |
| Battery life min.10 hours at room temperature | X | X | X |
| Transmission via WiFi | X | | X |
| CE conformity | X | X | X |
| Type plate | X | X | X |

* The monitor is connected to the power supply of the forklift. Mechatronic training or similar qualifications are recommended for this purpose.

| Article No. | Version | Sus-pension | Dimensions (WxH mm) | Weight (kg) | Scope of supply |
|-------------------|---------------------------|-------------|---------------------|-------------|---|
| LIZZARD-P-2A-1101 | LIZZARD Premium | ISO 2A | 123x595 | 8,65 | 1 LIZZARD Premium incl. cross laser protection class 1M, AHD camera, monitor and monitor mount, Smart Supply and battery charger, wiring, edge protection |
| LIZZARD-P-2B-1101 | | ISO 2B | 123x671 | 9,05 | |
| LIZZARD-P-3A-1101 | | ISO 3A | 125x695,5 | 10,2 | |
| LIZZARD-P-3B-1101 | | ISO 3B | 125x822,5 | 11,1 | |
| LIZZARD-P-4A-1101 | | ISO 4A | 125x870 | 11,4 | |
| LIZZARD-P-4B-1101 | | ISO 4B | 125x997 | 12,1 | |
| LIZZARD-T-2A-1101 | LIZZARD Target | ISO 2A | 123x595 | 5,44 | 1 LIZZARD Target incl. cross laser protection class 1M, Smart Supply and battery charger, edge protection |
| LIZZARD-T-2B-1101 | | ISO 2B | 123x671 | 6,06 | |
| LIZZARD-T-3A-1101 | | ISO 3A | 125x695,5 | 6,98 | |
| LIZZARD-T-3B-1101 | | ISO 3B | 125x822,5 | 8,21 | |
| LIZZARD-T-4A-1101 | | ISO 4A | 125x870 | 8,63 | |
| LIZZARD-T-4B-1101 | | ISO 4B | 125x997 | 9,51 | |
| LIZZARD-C-2A-0101 | LIZZARD Cam | ISO 2A | 123x595 | 8,1 | 1 LIZZARD Cam incl. AHD camera, monitor and monitor mount, Smart Supply and battery charger, edge protection |
| LIZZARD-C-2B-0101 | | ISO 2B | 123x671 | 8,5 | |
| LIZZARD-C-3A-0101 | | ISO 3A | 125x695,5 | 9,7 | |
| LIZZARD-C-3B-0101 | | ISO 3B | 125x822,5 | 10,6 | |
| LIZZARD-C-4A-0101 | | ISO 4A | 125x870 | 10,9 | |
| LIZZARD-C-4B-0101 | | ISO 4B | 125x997 | 11,6 | |

The illustrations only represent the basic principles and do not constitute a contractual entitlement.