




LIZZARD See and target!

The retrofit solution for precise and safe targeting of load carriers

- ▶ Precise targeting of load carriers
- ▶ Safe pick-up of load carriers
- ▶ Clear view of the load and over both forks (LIZZARDCam and LIZZARDPremium)
- ▶ Less damage to the transported goods
- ▶ Improved ergonomics for the forklift driver
- ▶ Simplified training of new warehouse staff
- ▶ High flexibility: application on any other device is quickly and easily possible
- ▶ Effective work

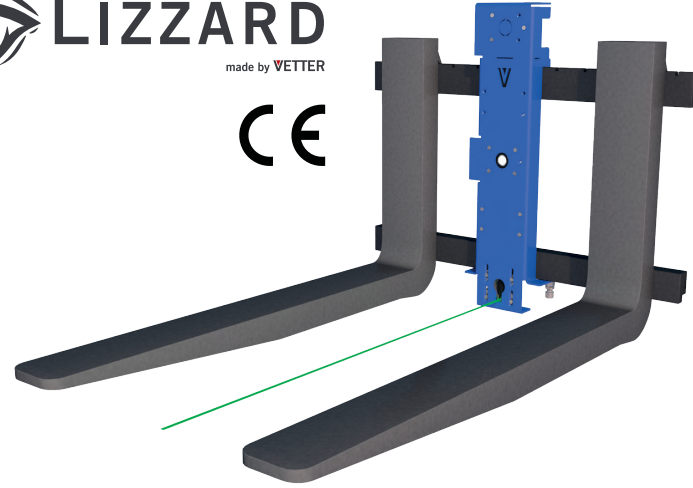


Precise targeting by using a cross laser



Cross laser green, protection class 1M



Monitor display in driver's cab

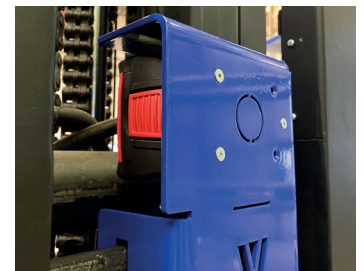

Wireless power supply with VETTER SmartSupply

Product properties	LIZZARD Premium	LIZZARD Target	LIZZARD Cam
Solid and robust technology	X	X	X
Plug & Play installation	X*	X	X*
1M laser, no risk of eye injury	X	X	
Cross laser green	X	X	
SmartEnergy: energy-saving mode, deactivation after 120 sec.	X	X	X
AHD camera with touch monitor	X		X
SmartSupply, Energy supply with standard 18 V battery by BOSCH	X	X	X
Battery life approx. 10 hours at room temperature	X	X	X
Transmission via WiFi	X		X
CE conformity	X	X	X
Type plate	X	X	X

* The monitor is connected to the power supply of the forklift. Mechatronic training or similar qualifications are recommended for this purpose.



Article No.	Version	Suspension	Dimensions (WxH mm)	Weight (kg)	Scope of supply
LIZZARD-P-2A-1-1-01	LIZZARD Premium	ISO 2A	123x595	8,65	1 LIZZARDPremium incl. cross laser protection class 1M, AHD camera, monitor and monitor mount, Smart Supply and battery charger, wiring, edge protection
LIZZARD-P-2B-1-1-01		ISO 2B	123x671	9,05	
LIZZARD-P-3A-1-1-01		ISO 3A	125x695,5	10,2	
LIZZARD-P-3B-1-1-01		ISO 3B	125x822,5	11,1	
LIZZARD-P-4A-1-1-01		ISO 4A	125x870	11,4	
LIZZARD-P-4B-1-1-01		ISO 4B	125x997	12,1	
LIZZARD-T-2A-1-1-01	LIZZARD Target	ISO 2A	123x595	5,44	1 LIZZARDTarget incl. cross laser protection class 1M, Smart Supply and battery charger, wiring, edge protection
LIZZARD-T-2B-1-1-01		ISO 2B	123x671	6,06	
LIZZARD-T-3A-1-1-01		ISO 3A	125x695,5	6,98	
LIZZARD-T-3B-1-1-01		ISO 3B	125x822,5	8,21	
LIZZARD-T-4A-1-1-01		ISO 4A	125x870	8,63	
LIZZARD-T-4B-1-1-01		ISO 4B	125x997	9,51	
LIZZARD-C-2A-0-1-01	LIZZARD Cam	ISO 2A	123x595	8,1	1 LIZZARDCam incl. AHD camera, monitor and monitor mount, Smart Supply and battery charger, wiring, edge protection
LIZZARD-C-2B-0-1-01		ISO 2B	123x671	8,5	
LIZZARD-C-3A-0-1-01		ISO 3A	125x695,5	9,7	
LIZZARD-C-3B-0-1-01		ISO 3B	125x822,5	10,6	
LIZZARD-C-4A-0-1-01		ISO 4A	125x870	10,9	
LIZZARD-C-4B-0-1-01		ISO 4B	125x997	11,6	

The illustrations only represent the basic principles and do not constitute a contractual entitlement.